



S'PRINT S

XXXXXXXXXX XX XXXXXXXXXXXXXXXXXXXXXXXX

 "sixload". black mark.



????????????

- 58
-


???????, ?????????? ? ??????? ?????? ????????:

- 2 CEE 7/16
- NEMA 1-15
- 3 G BS1363
- 2 AS3112 (1 1)

?????????? ????????

????? ??????	XXXXXXXXXX
XXXXXXXXXX XXXXX	8 dots / X
XXXXXXXXXX XXXXXXXX X XXXXX	24 (XXXXXX40/42 X XXXXXXXX)
XXXXXXXXXX	203dpi
XXXXXXXXXX XXXXXX (X / XX)	50 (X XXXXXXXXXX X XXXXXXXXXX XXXXXXXX, XXXXXXXXXX XXXXXX X XXXXXXXXXX XXXXXXXXXX XXXXXXXX XXXXXXXX)
XXXXXX XXXXXXXX	ASCII XXXXXXXX, XXXXXXXXXX
XXXXXX XXXXXXXX	XXXXXXXXXX, XXXXXXXX XXXXXXXX / XXXXXXXX, XXXXXXXXXX, XXXXXXXXXX, XXXXXXXX
XXXXXXXXXXXX XXXXXXXX	XXXXXX, XXXXXXXXXX
XXXXXX XXXXXXXX	58 X
XXXXXX XXXXXXXX	60X
XXXXXX XXXXXXXX	57.5 X± 1X
XXXXXXXXXX	CUSTOM
XXXXXXXXXXXX	XXXXXXXXXX 9 XXXXXXXXXX, RS232
XXXXXX XXXXXXXX	128 Byte
XXXX-XXXXXX	32 KB
XXXXXXXXXXXX XXXXXXXX	1 XXXXXXXX 384 x 85 dots
XXXXXXXXXX	Windows® (32/64 XXX) – XXXXXXXX X XXXXXXXX WHQL X XXXXXXXXXX XXXXXXXXXX
XXXXXXXXXX	9 - 48 VDC / 11VA
CXXXXXXX XXXXXXXXXX	1200 - 230 mA
XXXXXXXXXX XXXXX XXXXXXXXXX XXXXXXXX	260.000 XXXXXXX (XXXXXXXXXXXX XXXXXXX)
XXXXXXXXXX XXXXXXXXXX	0°C + 50°C
XXXXXXXXXXXXXX	CE
XXXXXXXXXX	(LxPxA) 146x88x65X
XXXX	0,370 X (XXXX XXXXXXXXXX XXXXXXX)

??????

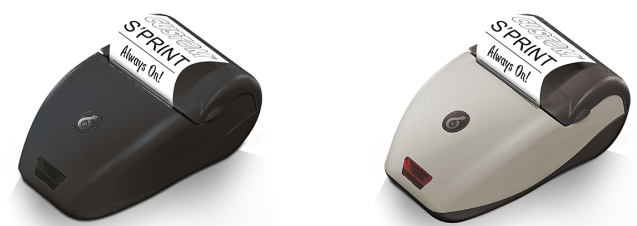

911DE010100133
PRINTER S'PRINT RS232 24 COL
BLACK

911DE010500112
PRINTER S'PRINT RS232 40 COL
BICOLOR