



TG2480HIII


/ 80

- /
- 200 dpi
- 80
- : 63 85 mm
- > 150 /
- RS232 USB
- : UPC-A, UPC-E, EAN13, EAN8, CODE39, ITF, CODABAR, CODE93, CODE128, CODE32, QR CODE
- : 1.000.000
- :
- , , , ,



??

-

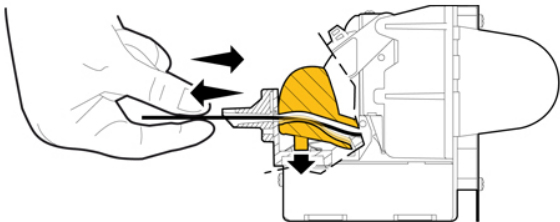

??

- Kiosk
 -
-

??

?????????

- 2
-

????

????

	8 /
	43 - 60 - 76
	203 dpi
/	150 /
	PC437, PC850. PC860. PC863, PC865, PC858, PC866, GB2312
	1 4
	, 180°
	80
	55 80 / ²
	63 85
	90
	, , , ,
	Custom/POS, TGH
	RS232 + USB
	2 kB
	1 MB
	2 608x430
	Windows® 32/64 — WHQL
	Linux 32/64
	COM Linux Windows 32/64
	OPOS
	, PrinterSet, CustomPowerTool, Custom Windows API
	24V +/- 10%
	0.8A (12,5%)
MTBF	450.000 ()
	50 /100M
	0°C + 50°C
	130,2 mm (W) x 271,5 mm (D) x 102 mm (H)
	1130

??



915CH030100300
PRINTER TG2480HIII USB RS232

Via I. Newton, 4 - 43010 Fontevivo PR - IT02498250345 - +39 0521 680111 - 7K4AJ54
28 2026